

HCS5610

PAY-PER-VIEW INTERFACE BOX WITH INTEGRATED HD TUNER

HCS5610



Pro:Idiom™ 

APPLICATIONS

- **Built-In Pro:Idiom™ Chip Set**
The Pro:Idiom System's high-quality security unlocks access to premium content availability to help assure rapid, broad deployment of HDTV and other high-value digital content.
- **HD PPV Interface**
Provides the High Definition Interface with Pay-Per-View providers.
- **Built-in ATSC/NTSC/QAM Clear Tuner**
- **RJP Auto-Sensing Remote Jack Pack compatible**
- **Remote Television Control**
Control television power on/off, input sources, adjust volume settings and change channels directly or through the MPI interface.
- **Remote Television Monitoring**
The status of each television can be monitored, providing information to verify that television is on-line and operating in compliance with an end-user's requirements.
- **One Year Warranty**

www.zenith.com
www.LGcommercial.com

zenith 

Compatible Models

LCD TV

20LS7DC
23LS7DC
26LC7DC
32LC7DC
37LC7D
42LC7D
47LC7DF

LCD MONITOR

M3201C-BA
M3701C-BA
M4210C-BA
M5500C-BA

PLASMA TV

50PC5DC

PLASMA MONITOR

50PM1M
MU-60PZ95V
71PY1M

HCS5610

PAY-PER-VIEW INTERFACE BOX WITH INTEGRATED HD TUNER



FEATURES

- RS-232C Input for compatibility with AV Control systems.
 - Built-in ATSC/NTSC/QAM tuner gives tuner capability for use with LG's LCD or Plasma monitor models.
 - RJP Interface for use with LG's optional Auto-Sensing remote jack packs: RJP-101M, RJP-110W/WBR, RJP-110F/FW, and RJP-110S models.
 - Time and cost-saving cloning option allows installers a quick and easy transfer (cloning) of settings to multiple HCS5610's in a fraction of the time.
 - HDMI with HDCP output from the HCS5610 to the television or monitor. Backward compatible with TVs/ Monitors with DVI input via HDMI-DVI Cable included.
- (Note: If using HCS5610 with an LG brand TV/Monitor, Owners Manual includes instructions for changing the input to HDMI).



INSTALLERS

- Zenith "Setup Remote" model #124-213-07 (sold separately) is required to configure the HCS5610.
- Zenith QuickSet II "Clone" Programmer model LT2002 (sold separately) is required for cloning.

TECHNICAL SPECIFICATIONS

Product Dimensions (D x W x H):	9.7" x 13.9" x 1.8
Weight:	7.7 lbs.
Carton Dimensions (D x W x H):	14.9" x 17.5 x 5.1
Shipping Weight:	7.9 lbs.
UPC Code	044642702519
Connector (MPI):	Standard RJ-11
Able to Address Up To:	1 Display
Computer Requirements:	Control Software and Standard Serial (RS-232) Interface
Source Selection:	Any valid input source
Command Set:	Digital MPI - Power On, Power Off, Volume Up, Volume Down, Set Maximum Volume, Set Minimum Volume.
Request TV Status:	Signal Strength, Power Status, TV Volume Level, Channel Number
Rating:	AC 100-240V ~ 50/60Hz, 40W
AC Input:	AC 120V ~ 60Hz, Max. 8A
AC Output:	AC 120V ~ 60Hz, Max. 8A
INPUTS	
Digital Video:	2 HDMI Inputs (for RJP use only)
Audio:	3.5mm stereo jack (for use with RJP)
MPI (on Superport card):	RJ-11 Modular Jack
Service:	RS-232C (9-pin D-Sub Male)
Remote In:	3.5mm jack (for IR Receiver)
OUTPUTS	
Digital Video:	1 HDMI Out
Audio:	3.5mm stereo jack (use with DVI/RGB)
Digital Audio:	Digital Audio Out (Optical) SPDIF
Display Control:	RS-232C 9-pin D-Sub Female
Aux Control:	3.5mm jack

DIMENSIONS

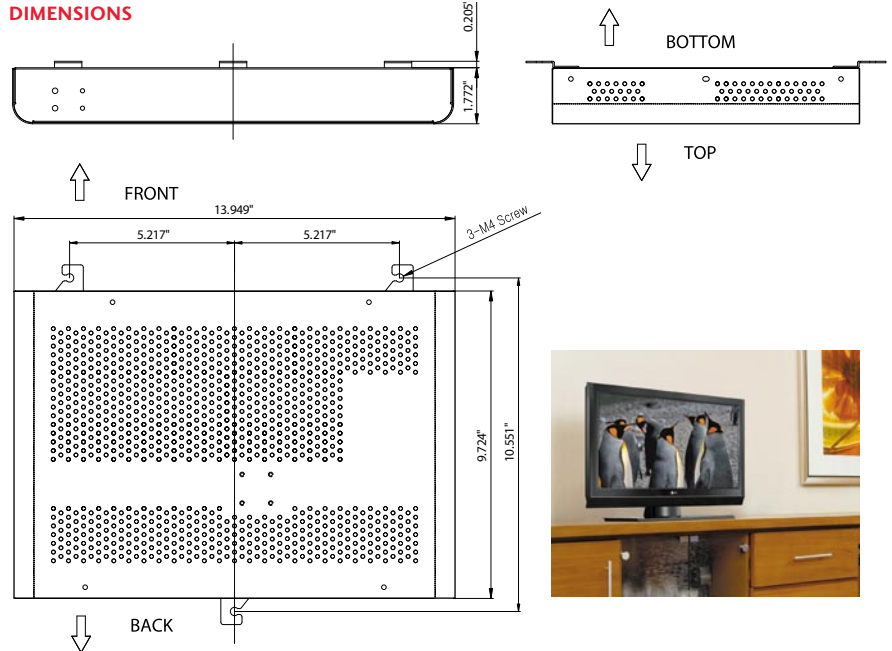

INCLUDED IN CARTON

- HCS5610 Pay-Per-View Interface Box with Integrated HD Tuner
- Installation and Operating Guide
- End-user Remote Control to operate HCS5610
- 6 ft. AC Power Cord (HCS5610 to AC power outlet)
- 3 ft. IR Receiver and optional bracket (for multiple mounting options)
- 5 ft. RS-232C M-to-F Cable (HCS5610 to Plasma Monitor/TV & LCD TV)
- 5 ft. RS-232C M-to-M Null Modem Cable (HCS5610 to LCD Monitor)
- 5 ft. HDMI to DVI-M Cable (HCS5610 to DVI In on Monitor/TV)
- 1 ft. DVI-F to HDMI Adapter Cable (adapts above cable for HDMI to HDMI)
- 5 ft. Audio "Y" Adaptor Cable 3.5mm Stereo Plug to 3.5mm Stereo Plug (use with DVI/RGB) and 2 RCA Plugs (for RJP use only, connect to AV1 L-R)
- 1 ft. Audio Adaptor Cable - 2 RCA Jacks to 3.5mm Stereo Plug (for RJP use only, connect to Audio In)
- Five (5) brackets with screws for attachment to HCS5610
- Five (5) screws for attaching the HCS5610 to a wall (M = Male, F = Female)

END USER REMOTE



OPTIONAL MOUNT/ACCESSORY

- Peerless® Mount PWMT300
- PWMT300-AC1 Peerless® Accessory for PWMT300

LG Electronics USA, Inc.

Commercial Products Division
 2000 Millbrook Drive, Lincolnshire, IL 60069 Customer Service: 1-888-865-3026
**Contact your LG Regional Sales Manager Toll-Free -
 Hospitality: 1-800-228-1236; B2B: 1-800-897-8788; Channel Markets: 1-800-897-8871**

Zenith-brand products are sold and serviced by LG Electronics USA, Inc. Dimensions and weights are approximate. Design and specifications subject to change without notice. The lightning bolt 'z' is a registered trademark of Zenith Electronics Corporation. Pro:Idiom is a trademark of Zenith Electronics Corporation. Peerless is a registered trademark of Peerless Industries Inc. All other trademarks are property of their respective owners.

